

03-06-00

A

03/03/00

Please type a plus sign (+) inside this box → ☐
 PTO/SB/05 (4/98)
 Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	MAJOR-062A
First Inventor or Application Identifier	HUSEK, Petr
Title	SORBENT CARTRIDGE FOR SOLID PHASE EXTRACTION
Express Mail Label No.	EL531408938US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 20]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 1]
4. Oath or Declaration [Total Pages]
- a. ☒ Newly-executed (original or copy) unexecuted
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

 ADDRESS TO: Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449
11. ☐ Preliminary Amendment
12. ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
13. ☒ Small Entity Statement(s) (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Lowell Anderson				
	STETINA BRUNDA GARRED & BRUCKER				
Address	24221 Calle de la Louisa, 4th Floor				
City	Laguna Hills	State	California	Zip Code	92653
Country	United States	Telephone	(949) 855-1246	Fax	(949) 855-6371

Name (Print/Type)	LOWELL ANDERSON	Registration No. (Attorney/Agent)	30,990
Signature	<i>Lowell Anderson</i>	Date	3/3/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
MAJOR-062A

Applicant, Patentee, or Identifier: Petr Husek
Application or Patent No.: Unknown
Filed or Issued: Herewith
Title: SORBENT CARTRIDGE FOR SOLID PHASE EXTRACTION

I hereby state that I am

- ☒ the owner of the small business concern identified below:
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN PHENOMENEX, INC.

ADDRESS OF SMALL BUSINESS CONCERN 2320 West 205th Street
Torrance, California 90501

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING _____

TITLE OF PERSON IF OTHER THAN OWNER _____

ADDRESS OF PERSON SIGNING _____

SIGNATURE _____ DATE _____

Certificate of Mailing under 37 CFR 1.8

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as Express Mail an envelope addressed to: Number: EL531408938US

Assistant Commissioner for Patents
Washington, D.C. 20231

on March 3, 2000
Date



Signature

SHAUNA S. CLARK

Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

- 1) UTILITY PATENT APPLICATION TRANSMITTAL
- 2) FEE TRANSMITTAL (in duplicate)
- 3) DECLARATION FOR UTILITY PATENT APPLICATION
- 4) STATEMENT CLAIMING SMALL ENTITY STATUS (unexecuted)
- 5) ASSIGNMENT OF APPLICATION (unexecuted)
- 6) PATENT APPLICATION ENTITLED: SORBENT CARTRIDGE FOR SOLID PHASE EXTRACTION
- 7) DRAWING (1 sheet)
- 8) RETURN POSTCARD
- 9) CHECK IN THE AMOUNT OF \$518.00

SORBENT CARTRIDGE FOR SOLID PHASE EXTRACTION

Background of Invention

5 The present invention relates to a sorbent cartridge especially useful for solid phase extraction but having applicability in other areas. Solid Phase Extraction (SPE) is a widely used sample preparation/purification technique applied for complex samples such as natural product extracts and body fluids. This technique uses small separation columns (cartridges) which contain a layer of sorbent material. The components of a sample passed through this layer of sorbent material are either retained on the surface of the sorbent material or pass through the sorbent material unretained. The nature of the sorbent material is usually chosen such that the components of interest are retained in the sorbent cartridge and those that pass through are either not of interest, or the failure to be absorbed indicates the absence of a particular component. The absorbed component is released during a later processing step for subsequent processing and/or analysis.

10 Commercially available SPE cartridges are available in various sizes, usually with an internal diameter of 5 mm and up, an internal volume of minimum 1 ml and contain 100-200 mg of sorbent material. In exceptional cases such cartridges can hold 25-50 mg of sorbent. Recently released SPE equipment operates plastic plates with 96 wells, each well containing 10-15 mg of sorbent material.

15 SPE cartridges are made by placing a first porous disk or glass or silicone wool at the bottom of the cartridge and then filling the sorbent material from top of the cartridge. The layer of sorbent material is kept in place with a second porous disk placed on top of the sorbent material. During use, the fluid sample, the wash and the extraction fluids are passed through the SPE cartridge from top to bottom, i.e. in the direction of gravitational forces. The fluid sample penetrates through the layer of sorbent material due to gravitation or centrifugation, or because of pressure or vacuum applied to the cartridge with various accessories, but the direction of flow is along the direction of gravity from the top to the bottom and then out an opening in the bottom.

Summary of Invention

An improved sorbent cartridge for use in preparing fluid samples for chemical analysis is provided by placing sorbent into a pipette tip at its distal end and sucking fluid to be analyzed into the sorbent with a setter. This mode of use reverses the fluid flow of a normal sorbent cartridge. The sorbent cartridge is formed from a pipette tip having a longitudinal axis and a tip with tapered interior having walls defining a cavity extending along the axis and opening at a distal end of the tip. A porous barrier is placed in the tapered cavity at a predetermined location in the tip to define a sorbent volume between the barrier, the cavity walls and the opening at the distal end of the tip. The barrier allows processing fluids to pass through the barrier. A sorbent material is placed in the sorbent volume. The sorbent material is preferably selected for use in chemical analysis and the barrier being selected to prevent passage of the sorbent material. This construction is adapted for use by applying a reduced pressure to draw or suck the fluid to be analyzed against the direction of gravity, through the tip of the pipette, through the sorbent and then through the barrier filter. This cartridge is especially suitable for preparing samples for chromatographic analysis, but has broader applicability.

Variations to this basic sorbent cartridge can be made. These variations include the addition of means for exerting a suction on the pipette to draw processing fluids through the opening in the tip, through the sorbent material and through the filter. A manually operated syringe structure or a pipette can achieve this. The syringe preferably comprises a setter in fluid communication with a second opening opposite the opening in the distal end. The setter is configured to mate with the second opening to place a first cavity in the setter in fluid communication with the filter. A plunger is slidably received in a second cavity in the setter and placed in fluid communication with the first cavity. The plunger and first cavity are sized relative to each other so as to create a suction sufficient to draw fluid from the opening in the tip into the cavity in the setter when the plunger slides in the second cavity.

Preferably, the size of the opening in the tip is from about 2-10 times the size of the material used in the sorbent material. Further, the sorbent material is placed in the cartridge by drawing a mixture of a solvent and the sorbent material through the opening in the distal end of the tip, with the solvent passing through the filter to leave

the sorbent in the sorbent volume. The sorbent material itself preferably has a coating of a solvent that is sticky enough to cause sorbent material to stick together and resist passage out of the opening in the tip. The solvent is preferably one of glycol or ethylene glycol, which do not adversely affect most analytical methods.

5 Advantageously, the sorbent volume comprises a tapered volume tapered toward the distal opening, and the porous barrier comprises a frusto-conical filter of similar shape, aligned to fit into and wedge into the tapered volume.

 Another aspect of this invention comprises an apparatus for analysis of fluid samples, preferably for use in chromatography. The apparatus comprises a hollow tip
10 having an opening in a distal end and means in the tip for retaining a porous barrier at a predetermined location to define a sorbent volume between the barrier and the opening in the hollow tip. A sorbent material is retained in the sorbent volume by the porous barrier, with the barrier allowing passage of fluids but not the sorbent material, during use of the apparatus. Suction means are placed in fluid communication with the hollow
15 tip to suck fluid through the opening in the distal end and through the sorbent material and porous barrier.

 The invention further comprises a method of forming a sorbent cartridge. A porous barrier is placed at a predetermined location in a hollow tip of a pipette to define a sorbent volume between the barrier and opening in a distal end of the tip. A slurry of
20 sorbent and a fluid is sucked or drawn into the sorbent volume through the opening in the distal end of the tip until the volume is filled with sorbent. The solvent is further sucked through the barrier while the barrier prevents passage of the sorbent. The solvent is selected so that it does not degrade later use of the sorbent for chemical analysis. This method advantageously allows the fast formation of a sorbent cartridge
25 with a high accuracy of the sorbent volume.

 This basic method is further varied by sucking a washing fluid through the opening, sorbent and barrier to remove undesired materials from the sorbent. Additionally, at least one cap can be placed on the tip to help prevent degrading the performance of the sorbent. The method further comprises the step of placing a syringe
30 suction device in fluid communication with the tip to exert a reduced pressure that draw fluids through the opening, sorbent and barrier and into the syringe. Alternatively, the method can comprise the step of placing a syringe device in fluid communication with

the tip to exert a positive pressure that forces fluids through the barrier, sorbent and opening. As with the apparatus, the method preferably leaves a coating on the sorbent that causes the sorbent material to stick to each other and resist falling out of the opening. That coating is achieved by using a solvent selected from the group comprising glycol and ethylene glycol.

There is also provided an improved method of forming and using the sorbent cartridge for chemical analysis. This method allows easy formation followed by immediate use, which has advantages in some applications. This method comprises the steps of placing a porous barrier at a predetermined location in a hollow tip of a pipette to define a sorbent volume between the barrier and opening in a distal end of the tip and sucking a slurry of sorbent into the sorbent volume through the opening in the distal end of the tip until the volume is filled with sorbent and sucking the solvent through the barrier while the barrier prevents passage of the sorbent. The solvent is selected so that it does not degrade later use of the sorbent for chemical or chromatographic analysis. A fluid sample to be analyzed is then sucked through the opening and into the sorbent to interact with the sorbent. Most of the fluid sample is withdrawn through the barrier except for the components retained on the sorbent. Advantageously, the sample components retained on the sorbent can be extracted from the sorbent by passing another fluid thorough the sorbent, by collecting this fluid in the setter and by transferring it into a removable container for further analysis or processing. Alternatively, by applying a positive pressure through the barrier into the sorbent the sorbent can be expelled out the opening for further analysis or processing of the sorbent after it has interacted with the fluid sample. In this case the directing of fluid flow is in the direction of gravitational forces.

The above methods and apparatus provide many advantages. One advantage of this invention is to provide a sorbent cartridge which is made of commercially available pipette tips or a similar conical body holding a small volume of sorbent material in the tip.

Another advantage of this invention is to provide a cartridge used for SPE filled with a sorbent underneath a porous layer that keeps the sorbent material in place during the filling of the tip and after the tip has been filled.

Another advantage of this invention is to provide a cartridge which may release the sorbent into a vial or reaction vessel for further sample preparation and/or analysis.

Another advantage of this invention is to provide a sorbent cartridge which may be made by an automated sample preparation instrument right before use in the shortest time.

Another advantage of this invention is to provide a sorbent cartridge which allows for small sample volumes to be prepared for analysis by requiring small amounts of reagents and by reducing sample dilution to minimum.

Brief Description of the Drawing

These and other features, advantages and objectives of this invention will be better understood by reference to the following description and the drawings, in which like numbers refer to like parts throughout the description, and in which:

Figure 1 is a perspective view of a pipette assembly of this invention;

Figure 2 is a partial sectional view of a tip of the assembly of Figure 1; and

Figure 3 is a partial sectional view of an alternate embodiment of the tip of the assembly of Figure 1.

Detailed Description

Referring to Figure 1, a pipette 10 has a suction device 11 coupled to a distal, hollow tip 12. Such pipettes 10 are made out of plastic, usually polypropylene, and have volumes ranging between 10 microliter up to several milliliters. The hollow tip 12 defines a cavity into which a sorbent barrier is placed. The sorbent barrier prevents passage of a sorbent material but allows passage of fluid. As used herein, fluid comprises liquids and gases, but the primary and preferred use of this invention is with liquids. In the illustrated embodiment, the sorbent barrier comprises filter disk 14 placed in the tip 12. The filter disk 14 separates the cavity into a first, distal volume or space 16 between a distal end 18 of the tip 12, and the filter 14, and a second volume or space 20 located between the filter disk 14 and the entrance 22 of the pipette. The size of the spaces or volumes 16, and 20 will vary depending on the size and location of the filter 14 and also on the total volume of the pipette tip. Advantageously, the space 16 forms part of a tapered cavity extending along the length of the distal end 18 of pipette

10, with the taper being uniform and symmetric about a longitudinal axis 21 of the tip 12. In short, the volume 16 preferably forms a conical shaped hollow, although other cavity shapes can be used. An opening 19 is formed in the distal end 18.

5 A porous boundary is to retain the sorbent material 26 while allowing the fluids to pass. The form and composition of the porous boundary will vary with the configuration of the surrounding structure, but in the illustrated embodiment the porous boundary is achieved by filter disk 14. The size of the filter disk 14 is tailored such that it can be inserted into the pipette tip 12 up to a certain depth and frictionally engage the interior walls of the tip 12 to remain in position during use. The filter 14 is preferably
10 inserted from the entrance 22 and urged toward the distal end 18. The filter 14 is preferably frusto-conical in shape, having a larger diameter and a smaller diameter, and preferably tapered at an angle that coincides with that of the tapered volume 16. It can be of variable length, but is preferably short, with a length of about 2 mm along the longitudinal axis 21 being believed suitable for smaller diameter filters 14. The filter 14
15 is configured or sized so that it wedges into place at a predetermined location in the tip 12, in order to provide a distal space 16 of a predetermined volume. Thus, the position of the filter 14 along the longitudinal axis 21 can determine the volume 16 in the tip 12. In this illustrated embodiment, the depth of penetration of the filter 14 along the longitudinal axis 21 thus depends on the diameter of the disk 14, which is used to limit
20 the volume 16 to be filled with sorbent material. The filter 14 is preferably made of porous polyethylene, although it could be made of other porous materials such as glass wool.

In more detail, and referring to Figures 1-2, the positioning of the filter disk 14 along the longitudinal axis 21 of pipette tip 12 is precisely defined so that the volume
25 16 delimited by the filter disk 14, the walls of the pipette tip 12 and the distal tip 18 of the pipette tip 12, are all controlled. This volume or space 16 defines the amount of sorbent material 24 that is held by the sorbent cartridge. This volume 16 advantageously ranges between 10 microliter up to 1 milliliter, although other volumes are possible but may require more customized pipette tips.

30 The filter 14 may be inserted into the pipette tip 10 by various ways that position the sorbent barrier, illustrated here by filter 14, at the desired location and that preferably fasten the filter 14 in position. Advantageously, the filter 14 is inserted by

placing the larger end of the filter 14 onto a distal end 28 of setter 26 (Figure 1) and inserting the setter 26 and filter 14 into the entrance of the pipette 10 until the filter wedges into the interior of the pipette tip 12. A narrow rod could also be used to push the filter 14 into position. If desired, markings on the setter 26 could be used in connection with the location of the opening 22 of the pipette 10, or a mark on the pipette 10, in order to indicate the appropriate insertion distance.

The tip 12 of the pipette 10, when fitted with filter 14 to define the distal volume 16, forms an empty sorbent cartridge 27.

The chemical nature of sorbent material 24 will vary with the sample to be analyzed. The sorbent material 24 typically comprises small, uniformly sized spherical media of silica or polymeric resin or other material onto which are bonded various chemical coatings. Preferably, the sorbent material 24 is added after the sorbent barrier, shown as filter 14, is positioned to define the distal volume 16. Preferably, the pipette 10 is placed onto a suction device 11 comprising setter 26 similar to a needle placed onto a syringe. The setter 26 acts as a syringe body, and a plunger 40 acts as the plunger to exert a sufficiently low pressure or vacuum to draw fluid into the needle and syringe body. Before describing the use, a further description of the plunger 40 and setter 26 are provided.

Referring to Figure 1, the setter 26 is tubular, with a cavity 36 extending along its longitudinal axis. The cavity 36 preferably forms a cylindrical cavity 36a for the length of the cylindrical outer diameter 30 and through the enlarged end 29. The cavity 36 preferably forms a tapered cavity 36b for the portion corresponding to the tapered end 31 of setter 26 and at the same taper angle. A distal end 38 of the setter 26 preferably has an opening 39 in communication with the cavity 36.

The plunger 40 is shaped to correspond with at least a part of the cavity 36, and preferably for all of it when the plunger 40 is inserted into the cavity 36. The plunger 40 has a handle 42 at one end. A central portion 44 of the plunger is cylindrical and sized to form a close fit with the cylindrical portion 36a of cavity 36, a fit tight enough to draw a vacuum as the plunger 40 is withdrawn from the cavity 36a. The other end 46 of plunger 40 is tapered, preferably to correspond to the tapered end 36b of cavity 36. The plunger 40 is shaped to act as a plunger for a syringe, with the setter 24 acting as

the syringe. An enlarged end 29 can be placed on the setter 26 to make it easier to draw the vacuum by relative movement of the plunger 40 and setter 26.

To load sorbent 24 into the cavity 16, the distal end 18 of the pipette tip 12 is immersed into a mixture made of the appropriate sorbent material and a solvent. A heterogeneous mixture of a solid (sorbent) and a liquid (solvent) is also referred to as a slurry and that term will also be used herein. The plunger 40 is then slowly withdrawn from the syringe body (setter 26) causing the slurry to fill the volume 16 under the porous boundary formed by filter 14. The solvent from the mixture passes through the filter 14 while the sorbent 24 does not, thus allowing the sorbent 24 to accumulate below the filter in the volume 16. The plunger 40 is withdrawn until the space 16 under the porous boundary is completely filled with sorbent material at which time the distal end 18 is withdrawn from the slurry. The plunger 40 is further withdrawn and exerts further suction until the slurry liquid is evacuated from the accumulated sorbent bed contained in the volume 16. The plunger 40 and syringe (setter 26) can then be withdrawn from the pipette 10, as the suction from the plunger 40 maintains the slurry liquid in the body of the setter 26. The slurry liquid can then be discarded after removing the sorbent cartridge and by pushing the plunger 40 into the setter 26 to squirt the slurry liquid out the opening 39 in the distal end 38 of the setter 26. Next the setter (26) will be reinserted for immediate use. Such setters 26 and plungers 40 are commercially available for use with pipettes 10.

The sorbent cartridge 27 prepared in this manner may be used immediately or can be stored for later use. The solvent used for slurry preparation has to meet certain requirements in order to insure proper filling of the cartridge and also to prevent sorbent loss during storage and use. The slurry must not interfere with the intended use of the sorbent. Thus, the slurry solvent is preferably chemically inert with the intended chemicals used later with the sorbent or with the sample components interacting with the sorbent during use. To make filling easier, it is preferred that the sorbent has about the same density as the mixture solvent so the sorbent 24 floats in the solvent. Further, the slurry solvent preferably wets the sorbent. A slurry solvent with low vapor pressure, that does not quickly evaporate, is thus preferred. The slurry solvent also preferably makes the sorbent slightly sticky so the sorbent sticks and clumps together so it does not readily fall out of the opening 19 in the distal end 18 of the tip 12. Finally,

the slurry solvent must pass through the sorbent barrier 14. Glycerol, ethylene glycol, or propylene glycol are believed to be suitable slurry solvents for many sorbents.

Referring to Figure 2, when the pipette 10 has the volume 16 filled with sorbent, a filled sorbent cartridge 27 is formed. Depending on the suction applied by the plunger 40, the sorbent 24 can be packed into the volume 16 to varying degrees. The sorbent 24 advantageously substantially fills all of the volume 16, and is packed tight enough so that sorbent 24 does not fall out of the opening 19 in the distal tip 18. As mentioned above, using a solvent that leaves the sorbent slightly sticky can help the sorbent from unintentionally leaving the sorbent volume 16. The sorbent volume once filled will hold about 50-60% solid sorbent. The remaining portion of the sorbent volume 16 comprises the empty, interstitial space between the particles that comprise the sorbent 24. It is difficult to pack more than that amount of granular material in a volume without crushing the material. If less than that amount is packed in to the volume, the packing is so loose that it falls out.

The filled cartridges 27 may be capped at one or both ends 22 and 18 in order to preserve the sorbent bed for protracted periods of time. Suitable caps 32, 34 are illustrated schematically in Figure 2, placed over the ends 19 and 22, respectively, although other forms of caps or sealants can be used. The caps can thus take various shapes such as the hollow, cup-like caps illustrated, and are made of material that does not affect the intended use of the sorbent 24. Polyethylene is one example of a cap material. The cap 34 over the end 22 of the pipette 10 is not needed if the plunger (setter 26) is inserted into the pipette 10, as the fit between the outer cylindrical portion 30 and the inner cylindrical portion 13 is close enough to form a seal.

Advantageously, commercially available pipette tips are used. It is preferable that the opening 22 to the pipette be standard size such that conventional commercially available pipettes, setters or automated liquid dispensing devices be attached to the sorbent cartridge 12. Further, it is preferable that the small opening 19 at the distal end 18 be slightly larger than normal to make it easier to load the sorbent slurry, with the size of the opening 19 in the end 18 varying depending on the nature of the sorbent 24 and in particular depending on the size of the media particles used in the sorbent.

The standard pipette tip has an opening in end 18 of 0.5 mm (0.02"). The preferred size of the opening 18 for the present application is about 0.8 mm (0.032").

The preferred opening 19 in end 18 is thus about 50% larger than the standard opening in the pipettes 10. This preferred size of opening 19 is about 3 to 10 times larger than the size of the sorbent material 24, which is typically comprised of generally uniformly sized spheres. Thus, it is preferred that the opening 19 be at least 2 time the size of the largest media used in the sorbent material 24, and preferably from 3 to 10 times larger. Larger sizes of opening 19 can be used, but with greater risk that the sorbent material 24 will fall out. If desired, a retainer frit or screen can be fastened over the end of the opening 19 after the sorbent material 24 is placed in the volume 16. But that hinders the ability to expel sorbent 24 from the sorbent volume 16 in some analytical applications.

The resulting pipette cartridge 27 has a small volume of sorbent 24 in the cartridge 27. The placement of that sorbent 24 in the pipette tip 12 makes it very easy to use. A description of one example of the use of this invention will help illustrate the advantages of the cartridge 27. The distal tip 18 of a sorbent cartridge 27 is placed onto a setter 26 and the tip 18 immersed into a sample of body fluid such as serum. A volume of sample is withdrawn by pulling on the plunger 40 to suck the serum into the cartridge 27. The suction causes the sample fluid (e.g., serum) to pass thorough the layer of sorbent material 24 by slowly withdrawing the plunger 40 of the setter 26. The free amino acids present in the serum sample are retained on the surface of the sorbent material 24 in the cartridge 27 as the sample (e.g., serum) passes over the sorbent material. Once a sufficient sample is withdrawn and passed through the sorbent material 24, the distal tip 18 is withdrawn from the serum. The plunger 40 is withdrawn enough to suck the sample (e.g., serum) through the sorbent material 24 and through the filter 14. The distal tip 38 of the setter 26 is adjacent the filter 14 and the sample (e.g., serum) passes into the cavity 36 in the body of the setter 26. The setter 26 and the remnants of the sample (e.g., serum) in the setter 26 can then be removed from the pipette 10. Pushing on the plunger 40 creates a positive pressure that causes the remnants of the sample (e.g., serum) to be expelled from the setter 26. The remnants of the sample (e.g., serum) can be discarded, or placed in a vial for further use, depending on the analytical process being used.

After discarding the remnants of the sample (e.g., serum) from the setter 26, the setter 26 may be immediately inserted in to the pipette 10 for subsequent use, or it may

be washed by withdrawing the plunger 40 to suck a cleaning fluid into the cavity 36 of the setter 26 and then expelling the cleaning fluid by pushing on the plunger 40.

Next a washing solution is passed through the cartridge 28 by placing the distal end 18 in a washing solution and withdrawing the plunger 40 to suck the cleaning fluid through the sorbent bed 24, through the filter 14 and into the cavity 36 of the setter 26. The washing step is used to help remove sample droplets (e.g., droplet of serum) trapped between sorbent particles. The washing step can be repeated as needed.

In the next step of the illustrative process the amino acids retained on the sorbent material are released by extraction with an appropriate solvent. Thus, a solvent is drawn by suction into the cartridge 27, through the sorbent bed 24 to create an amino acid extract that passes through the filter 14 and into the cavity 36 of the setter 26. The amino acid extract is expelled from the cavity 36 of the setter 26 by pushing the plunger 40 to expel the extract from the opening 39 in the setter. The extract can be expelled into a vial or other desired receptacle or location for further analysis or for further preparation for analysis.

Alternatively, the extraction step may be performed in a vial after the sorbent material 24 is expelled from the cartridge 27 into the vial. This can be accomplished by filling some fluid into the cavity 36 of the setter 26, inserting the setter 26 into the pipette 10, depressing the plunger 40 to pass the fluid through the filter disk 14 toward the tip 18 of the cartridge 27 - which is in the opposite direction used to fill the cartridge. A sufficiently high positive pressure caused by the plunger 40, will expel the sorbent 24 out the opening 19 in the tip 18, into the desired location or vial

The use of readily available components such as the pipettes 10, setter 26 and plunger 40 provides a cost effective apparatus. Equally important is that the volume of the sorbent 24 can be accurately varied from very small volumes to much larger volumes. This allows the efficient use of small volumes of sample and sorbents. It also reduces waste; saves reagents used in subsequent sample preparation. The operation of the plunger 40, setter 26 and pipette 10 is easily achieved, and it allows manual control over the process. Further, while it is preferred that the sorbent bed 24 remain in the cartridge 27 and the various analytical chemicals be sucked through the bed by withdrawing plunger 40, it is possible to eject the sorbent bed 24 from the cartridge 27 for exhaustive extraction. This provides a versatile way of processing, or partially

processing samples. Moreover, the preferred conical shape of the sorbent volume 16 is believed to provide efficient fluid flow as the fluid enters a small area and is drawn by reduced pressure to a larger surface on the upper end of the conical sorbent volume 16.

The illustrated embodiment uses a tapered cavity to form the volume 16, and a conical filter 14 to form the porous barrier that retains the sorbent 24 while allowing fluids to pass. Other arrangements are possible. For example, referring to Figure 3, the interior of the tip 12 could comprise cylindrical segments having diameters that decrease toward the tip 18 with a tapered, conical end at the tip 18. A cylindrical filter 14a rests on the ledges formed by the steps to position the filter 14a along the longitudinal axis 21. By selecting the filter 14a of an appropriate diameter, the position of the filter along the axis 21 can be controlled. The steps can be located at predetermined intervals to make it easy to determine the volume 16 of the sorbent bed 24. The disadvantage of this construction is that it requires special manufacturing of the tip 12, whereas the preferred embodiment uses conventional pipette tips 12 or slight variations of those tips, and that helps reduce costs.

In the above embodiments, the opening 19 in the tip 18 is smaller than the filter 14, 14a, and the cross-sectional area at the filter 14, 14a is larger than the cross-sectional area of the opening 19 in tip 18. This results in a sorbent volume 16 that narrows toward the opening 19 in the tip 18, with the narrowing preferably being a uniform taper, like in a cone. That narrowing causes the sorbent 24 to wedge toward the narrower opening 19 in tip 18, which helps the sorbent 24 to stick together and not fall out the opening 19 under the influence of gravitational forces. The narrower opening 19 in the tip 18 is also selected to hinder the sorbent 24 from falling out of the volume 16 under the influence of gravity. If a volume 16 is used that does not have a tapered shape, the volume 16 preferably still has a narrow opening in the tip 18 to help retain the sorbent 24 in the volume 16, and preferably has at least a slight taper immediately adjacent that opening in tip 18 to provide a slight wedging action on the sorbent 24. As described above, the size of the opening 19 in the tip 18 is has to be larger than the largest particle in the sorbent 24 in order for the sorbent to enter the volume 16, but the opening is preferably only a few times larger than the largest dimension of the particles comprising the sorbent 24 as that helps hinder the particles from falling out of the volume 16 under the force of gravity.

The above methods and apparatus provide many advantages. The sorbent cartridge 27 can be made of commercially available pipette tips or a similar conical body holding a small volume of sorbent material in the tip, although preferably slight modifications are made to the pipette tips as described herein. The use of commonly available parts, or modifications of such commonly available parts, reduces costs while allowing a high repeatability and accuracy of the sorbent volume 16. It should be understood, however, that other shapes of the tip 12, sorbent volume 16 and filter 14 can be used other than the preferred conical shapes.

Another advantage of this invention is to provide a cartridge 27 especially suitable for SPE that is filled with a sorbent underneath a porous layer 16 that keeps the sorbent material 24 in place during the filling of the tip 12 and after the tip has been filled. The location of the porous layer 16 on an interior end of the sorbent volume 16 and the passage of the fluid in a direction away from the opening 19 in the distal end of the tip 18, which is normally opposite the direction of gravity, also provides a simple and accurate way to achieve a sorbent cartridge 27.

Another advantage of this invention is to provide a cartridge which may release the sorbent into a vial or reaction vessel for further sample preparation and/or analysis. The use of the plunger 40 to draw fluids through the sorbent 24 and into a removable syringe (cavity 36 of setter 26) provides an easy and readily accessible way to prepare samples for testing and analysis. Further, by pushing on the plunger 40 the sorbent 24 can be expelled from the tip 12 for collection and use in chemical analysis. The manually operated plunger 40 and syringe (setter 26) also provide an inexpensive yet readily available means for manually controlling the formation of the sorbent cartridge 27, and the passage of fluids through the sorbent cartridge for analysis and removal.

Another advantage of this invention is to provide a sorbent cartridge which may be made by an automated sample preparation instrument right before use in the shortest time. It is believed possible to draw in the slurry containing the sorbent and form the sorbent cartridge 27 in less than a minute. After discarding the solvent used in the slurry, which takes only moments, the sorbent cartridge 27 is ready for immediate use. The time to form the sorbent cartridge 27, less than a minute, is a very short time. That short time provides great flexibility as well as significant savings of labor and associated costs.

The above description is given by way of example, and not limitation. Given the above disclosure, one skilled in the art could devise variations that are within the scope and spirit of the invention, including various sequences of sucking in processing fluids through the sorbent bed 24 and expelling fluids through the sorbent bed 24. Also, it is believed possible, but not preferable, to place the sorbent 24 into the space 12 from the opening 22 rather than the opening 19 in end 18, and then place the filter 14 into position with any excess sorbent material 24 being forced out the opening in the end 18. Further, while this invention is described using a manually operated suction device 11, preferably in the form of a syringe or compressible bulb, various motor driven suction devices and vacuum pumps could also be used to form the pipette 10, especially where the fluid is not desired to be retained for further analysis. Moreover, the various features of this invention can be used alone, or in varying combinations with each other and are not intended to be limited to the specific combination described herein. Thus, the invention is not to be limited by the illustrated embodiments but is to be defined by the following claims when read in the broadest reasonable manner to preserve the validity of the claims.

WHAT IS CLAIMED IS:

1. A sorbent cartridge for use in preparing samples for chemical analysis, comprising:

a pipette tip having a longitudinal axis and a hollow distal tip with tapered walls defining an interior cavity extending along the axis and opening at a distal end of the tip;

a porous barrier in the tapered cavity placed at a predetermined location in the tip to define a sorbent volume between the barrier, the cavity walls and the opening at the distal end of the tip, the barrier allowing processing fluids to pass through the barrier; and

a sorbent material in the sorbent volume, the sorbent material being selected for use in the chemical analysis and the barrier being selected to prevent passage of the sorbent material out of the sorbent volume.

2. The sorbent cartridge of Claim 1, further comprising a manually operated suction device on the pipette to exert a suction on the pipette to draw processing fluids through the opening in the tip, through the sorbent material and through the porous barrier.

3. The sorbent cartridge of Claim 1, wherein the pipette tip has a second opening opposite the opening in the distal end, and further comprising a setter configured to mate with the second opening to place a first cavity in the setter in fluid communication with the porous barrier, the setter having a plunger slidably received in a second cavity in the setter and placed in fluid communication with the first cavity, the plunger and second cavity sized relative to each other so as to create a suction sufficient to draw fluid from the opening in the tip into the cavity in the setter when the plunger slides in the second cavity.

4. The sorbent cartridge of Claim 1, where the size of the opening in the tip is from about 2-10 times the size of the material used in the sorbent material.

5. The sorbent cartridge of Claim 1, wherein the sorbent material is placed in the cartridge by drawing a slurry of a solvent and the sorbent material through the opening in the distal end of the tip, with the slurry solvent passing through the porous barrier to leave the sorbent in the sorbent volume.

6. The sorbent cartridge of Claim 1, wherein the sorbent material has a coating of a solvent that is sticky enough to cause sorbent material to stick together and resist passage out of the opening in the tip.

7. The sorbent cartridge of Claim 5, wherein the solvent is one of glycerol, ethylene glycol, or propylene.

8. A sorbent cartridge, comprising:

a pipette tip having an interior cavity in fluid communication with a distal opening located in the tip;

a filter placed in the tip and defining a predetermined volume between the barrier and the distal opening; and

a sorbent material substantially filling the volume, the barrier retaining the sorbent material in the predetermined volume while allowing passage of processing fluids through the filter during use of the cartridge.

9. The sorbent cartridge defined in Claim 8, wherein the pipette tip has a second opening adapted to removably receive a syringe to draw fluid from the distal opening, through the sorbent material and filter into the syringe.

10. The sorbent cartridge of Claim 8, wherein the predetermined volume is tapered toward the distal opening to form a frusto-conical shaped cavity and the porous barrier comprises a frusto-conical filter.

11. The sorbent cartridge of Claim 8, wherein the distal opening has a diameter of about 2-10 times the maximum diameter of the sorbent material.

12. The sorbent cartridge of Claim 9, wherein the syringe contains a fluid drawn from the distal opening through the sorbent material and filter.

13. The sorbent cartridge of Claim 8, wherein the sorbent material has a coating of a solvent that is sticky enough to cause sorbent material to stick together and resist passage out of the opening in the tip.

14. The sorbent cartridge of Claim 13, wherein the slurry solvent is one of propylene glycol, ethylene glycol or glycerol.

15. An apparatus for analysis of fluid samples for use in chemical analysis, comprising:

a hollow tip having an opening in a distal end;

means in the tip for retaining a porous barrier at a predetermined location to define a sorbent volume between the barrier and the opening in the hollow tip;

5 a sorbent material retained in the sorbent volume by the porous barrier, the barrier allowing passage of fluids but not the sorbent material, during use of the apparatus;

suction means in fluid communication with the hollow tip to suck fluid through the opening in the distal end and through the sorbent material and porous barrier.

10 16. A method of forming a sorbent cartridge, comprising the steps of:

placing a porous barrier at a predetermined location in a hollow tip of a pipette to define a sorbent volume between the barrier and an opening in a distal end of the tip; and

15 sucking a slurry of sorbent into the sorbent volume through the opening in the distal end of the tip until the volume is filled with sorbent and sucking the solvent through the barrier while the barrier prevents passage of the sorbent, the solvent being selected so to permit use of the sorbent for an intended chemical analysis.

20 17. The method of Claim 16, comprising the further step of sucking a washing fluid through the opening, sorbent and barrier to remove undesired sample components from the sorbent.

18. The method of Claim 16, comprising the further step of placing at least one cap on the pipette tip to help prevent degradation the performance of the sorbent.

25 19. The method of Claim 16, comprising the further step of placing a manually operated suction device in fluid communication with the tip to draw fluids through the opening, sorbent and barrier and into the suction device.

20. The method of Claim 16, comprising the further step of placing a syringe in fluid communication with the tip to force fluids through the barrier, sorbent and opening.

30 21. The method of Claim 16, wherein the solvent leaves a coating on the sorbent that causes the sorbent material to stick together and resist passage out of the opening.

22. The method of Claim 16, wherein the solvent is selected from the group comprising glycerol, ethylene glycol, or propylene glycol.

23. A sorbent cartridge formed by the method of Claim 16.

24. A sorbent cartridge formed by the method of Claim 19. .

5 25. A sorbent cartridge formed by the method of Claim 21.

26. A sorbent cartridge formed by the method of Claim 12.

~~27.~~ A method of forming and using a sorbent cartridge for chemical analysis, comprising the steps of:

10 placing a porous barrier at a predetermined location in a hollow tip of a pipette to define a sorbent volume between the barrier and an opening in a distal end of the tip;

15 sucking a slurry of sorbent into the sorbent volume through the opening in the distal end of the tip until the volume is filled with sorbent and sucking the solvent through the barrier while the barrier prevents passage of the sorbent, the solvent being selected so that it does not degrade later use of the sorbent for chemical analysis; and

sucking another fluid through the opening, sorbent and barrier to interact the other fluid with the sorbent and then withdraw the other fluid from the sorbent.

20 28. The method of Claim 27, wherein the solvent is selected to leave a coating on the sorbent that causes the sorbent to stick together and resist passage out of the opening.

25 29. The method of Claim 27, comprising the further step of drawing the other fluid into a removable container after it has interacted with the sorbent, and removing that other fluid from the removable container for further analysis or processing.

30. The method of Claim 28, comprising the further step of drawing the other fluid into a removable container after it has interacted with the sorbent, and removing that other fluid from the removable container for further analysis or processing.

30 31. The method of Claim 27, comprising the further step of applying a positive pressure through the barrier into the sorbent and out the opening to expel the sorbent for further analysis or processing.

32. The method of Claim 28, wherein the removable container comprises a body of a syringe that is used to draw the other fluid through the opening, sorbent and barrier and into the syringe.

Abstract of the Disclosure

An improved sorbent cartridge for use in preparing fluid samples by solid phase extraction for chemical analysis is provided that uses a pipette having a longitudinal axis and a tip having walls defining a uniformly tapered interior cavity extending along the axis and opening at a distal end of the tip. A porous barrier is placed in the tapered cavity at a predetermined location in the tip to define a sorbent volume between the barrier, the cavity walls and the opening at the distal end of the tip. The barrier allows processing fluids to pass through the barrier while retaining the sorbent. A slurry of sorbent material is drawn into the sorbent volume by a syringe in fluid communication with the pipette tip. The solvent is drawn through the barrier, filling the sorbent volume with sorbent material. A serum to be analyzed is similarly drawn into the sorbent through the opening in the distal end of the tip, by applying a suction to the tip. After interacting with the sorbent material, the serum is further drawn through the barrier into the syringe and removed for analysis or use.

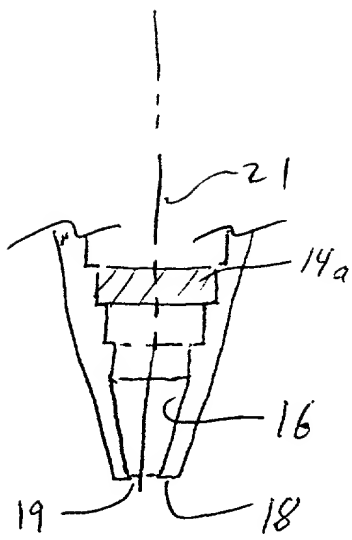


Figure 3

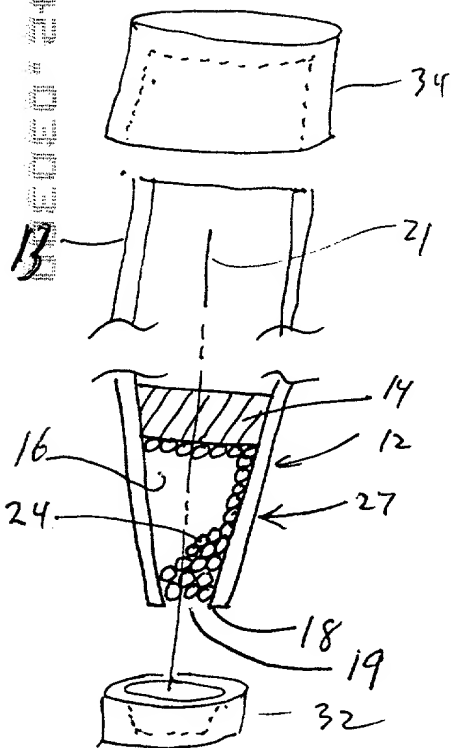


Figure 2

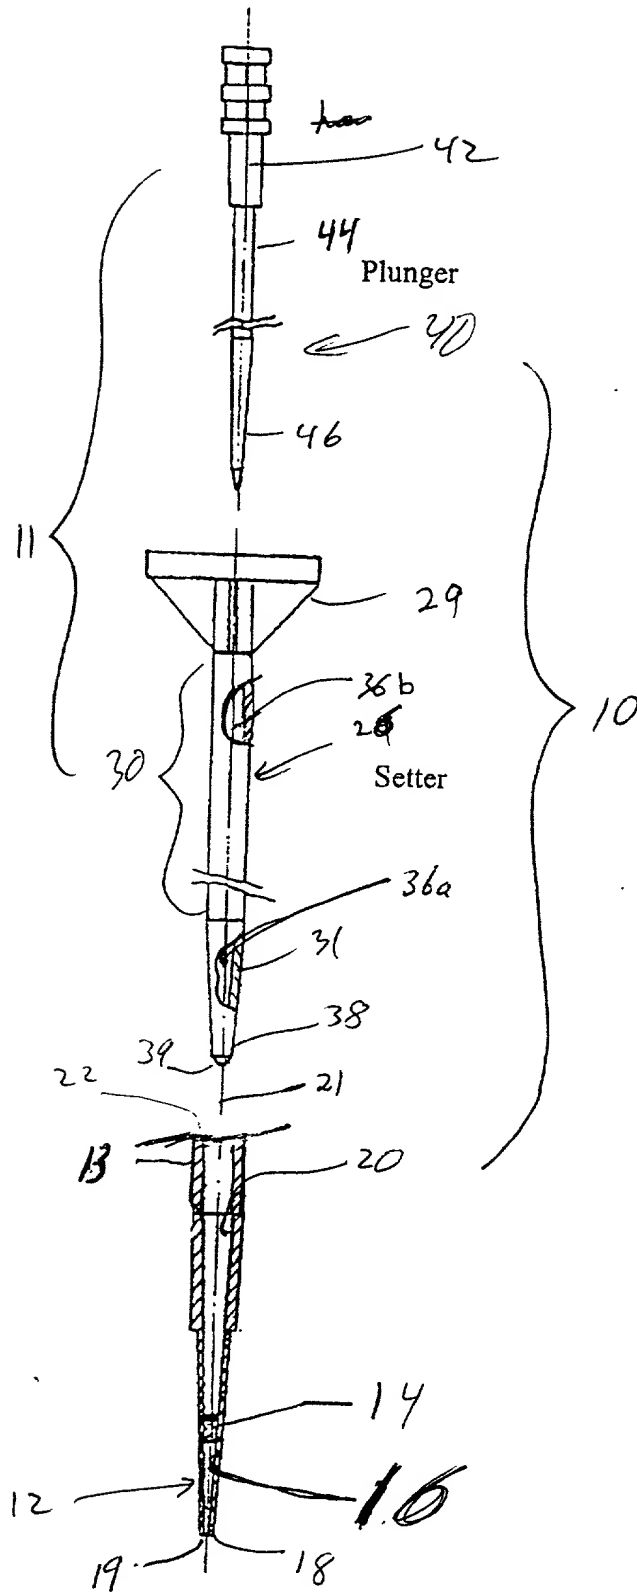


Figure 1

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	MAJOR-062A
	First Named Inventor	HUSEK, Petr
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SORBENT CARTRIDGE FOR SOLID PHASE EXTRACTION

the specification of which *(Title of the Invention)*

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PV 769-99	Czech Republic	03/04/1999	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
<input type="text"/>	<input type="text"/>

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
KIT M. STETINA	29,445	BRUCE B. BRUNDA	28,497
MARK B. GARRED	34,823	WILLIAM J. BRUCKER	35,462
MATTHEW A. NEWBOLES	36,224	THOMAS C. NABER	26,777
LOWELL ANDERSON	30,990	ERIC L. TANEZAKI	40,196

☒ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☒ Correspondence address below

Name	LOWELL ANDERSON				
Address	STETINA BRUNDA GARRED & BRUCKER				
Address	24221 Calle de la Louisa, 4th Floor				
City	Laguna Hills	State	CA	ZIP	92653
Country	United States	Telephone	(949) 855-1246	Fax	(949) 855-6371

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname	
Petr		HUSEK	
Inventor's Signature	Date		
Residence: City	State	Country	Czech Republic
Post Office Address	4 Nad pruhy		
Post Office Address	Praha 4		
City	State	ZIP	CZ-147 00
Country	Czech Republic		

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

